

**Part
No.**

**Thread
„T“**


**A
max.
[mm]**

**B
max.
[mm]**

**SW
[mm]**


Gerade (AN 832) / Straight (AN 832) S.A.E. 37° (JIC/AN)

832-03 SS ⁵	3/8 -24 UNF	23,9	16,8	14,0
832-03D	3/8 -24 UNF	23,9	16,8	14,0
832-04D	7/16-20 UNF	26,3	18,5	17,0
832-06D	9/16-18 UNF	33,8	22,4	22,0
832-08D	3/4 -16 UNF	34,1	23,8	25,4
832-10D	7/8 -14 UNF	40,9	27,5	28,6
832-12D	1-1/16-12 UN	45,0	31,6	34,9
832-16D	1-5/16-12 UN	45,1	32,6	41,3

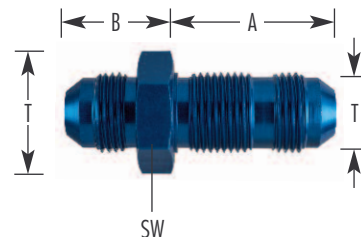

Gerade Metrisch (DIN) Dichtkegel 60° / Straight Metric (DIN) cone 60°

832-12x1,5	M 12x1,5	21,3	15,4	17,0
832-14x1,5	M 14x,15	21,3	15,6	19,0
832-18x1,5	M 18x1,5	25,9	16,0	24,0
832-22x1,5	M 22x1,5	21,7	17,0	27,0
832-26x1,5	M 26x1,5	25,1	15,6	36,0



³ Bordwanddurchführungen ohne Mutter / Bulkhead without nut

⁴ S für Stahl / S for steel

⁵ SS für Edelstahl / SS for stainless steel