



Unit Identification
(Laser etch...)

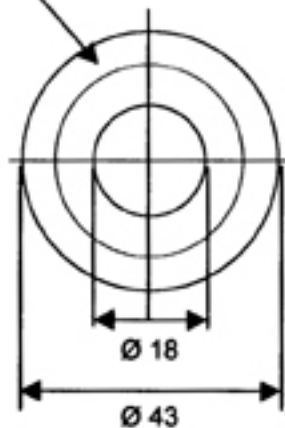

FLOW

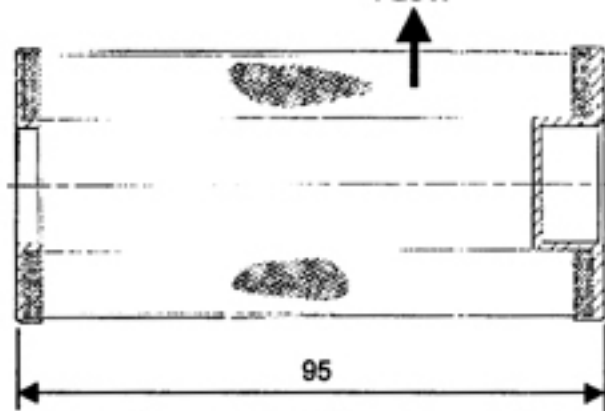

ELEMENT DATA

- | | |
|---|-------------------------------------|
| 1. Filtration Rating :- | 40µm Absolute -
Glass Bead Test |
| 2. Temperature Range :- | Up to 120°C |
| 3. Element Pressure Drop Factor :- | 1.2 mbar/l/min at 5cSt
at 0.9 SG |
| 4. Element Burst Differential Pressure :- | 3 bar MIN |
| 5. Materials of Construction | |
| End Caps :- | Aluminium Alloy |
| Mesh :- | Stainless Steel. |
| Shroud :- | Stainless Steel |
| Fabrication Method:- | Epoxy Resin Bonded |
| 6. Estimated Mass :- | 113g |

© 1999 PALL CORPORATION

Unauthorised use, manufacture, or reproduction in whole or in part is prohibited. Drawing, design, design rights and all disclosures are the property of:-
PALL CORPORATION LTD

PALL AEROSPACE

Dimensions in millimetres
DO NOT SCALE

NOT FOR MANUFACTURE

STYLE NUMBER

11

ISSUE

1